

Application

- Based on the balancing software license VM100-HUM for the vibration analyzers VM100A and VM100B
- Includes the Vibration Analyzer VM100B, sensor and accessories
- Measurement of the vibration effect on the body via seat, backrest and feet
- Maximum Interval RMS of X/Y/Z to ISO 2631 / ISO 8041-1
- Maximum Vibration Dose Value(VDV) of X/Y/Z to ISO 2631 / ISO 8041-1
- Occupational health measurements to EU directive 2002/44/EC and development-related measurements on machines and vehicles

Properties

- Easy to use and clear user guidance
- Simultaneous display of 3 different meaurements, e.g. RMS, VDV, unweighted
- Display of 3 axis values (X/Y/Z) and total values
- Graphical plot display up to 10 hours
- Display of the remaining work time before reaching the exposure limit value
- External reset via dgital input
- · Advantageous in combination with the FFT analysis included in the scope of delivery
- Expandable for hand-arm vibraten (compare VM100B-HAWB)




Technical Data


Measuring channels	3 (X/Y/Z)
Weighting filters whole-body (ISO 8041-1)	Wb, Wc, Wd, We, Wj, Wk, Wm and band filter 0.4 – 100 Hz
Overall values for whole-body vibration to ISO 2631	Interval RMS values X/Y/Z
	Maximum RMS (MTVV)
	Crest factor
	Vibration Dose Value (VDV)
Plot diagram	Up to 10 h running RMS of X/Y/Z or max. interval RMS
Data export	CSV measurement data table and bitmap screenshot

Scope of delivery Kit VM100B-WB:

VM100B Vibration Analyzer, 3 channels Triaxial seat pad accelerometer KS963B100-S





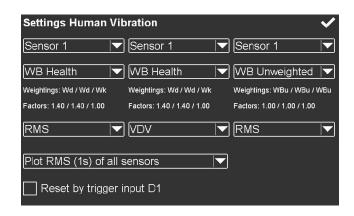

Manfred Weber



07.25